


ASSEMBLY INSTRUCTIONS

INSTALLING FLOOR TO CEILING CABLES

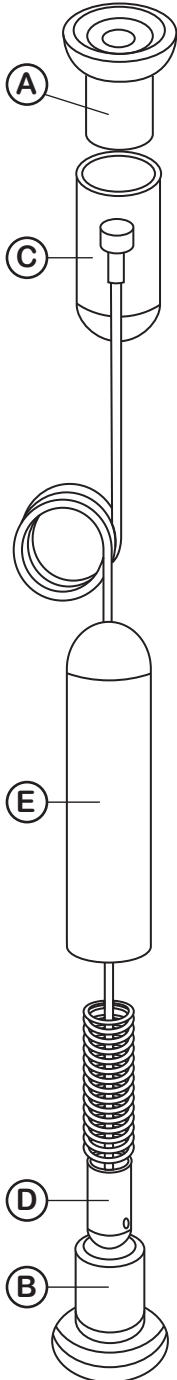

Determine the cable centre measurements required by measuring between the fixing posts on the light pockets and transfer these measurements to the floor.

Having marked out the floor positions for the pair of cables, use a plumb bob to find the location on the ceiling directly over the floor position.

Unscrew the fixing **A** from the ceiling fixing **C** and securely fix to your mark on the ceiling.

Do the same to the floor with fixing **B** from the cable tensioner.

Hang the cable from the ceiling fixing **C** allowing cable to slowly unwind.

Undo the small brass fitting **D** attached to the cable inside the tensioner **E** with the 1.5mm allen key provided and while keeping cable under tension slide brass fitting up the cable until it is flush with the top of the floor fixing **B** and re-tighten.

Cut off the excess cable so that it is 7mm below the top edge of the floor fixing.

Screw the outer body of the tensioner **E** on the floor fixing **B**.

You should feel the tension starting to be taken up just before the tensioner is screwed fully down. Please note that the cable will pull gently out against the spring when tensioned correctly. If there is no movement the tension is too strong and the brass fitting needs to be moved down the cable slightly to release some of the tension.

Repeat the above procedure for the second cable.

Remember, the cable is only as strong as your fixing to the ceiling.

Tel: 0116 2554640 Fax: 0116 2550572

ASSEMBLY INSTRUCTIONS


INSTALLING LIGHT POCKETS ON TO FLOOR TO CEILING CABLES

The light pocket comes complete with fittings for attaching to cables. It is important that before you fit the light pocket check that the pockets are opening from the top and that the slots for fixing the pocket to the cable are to the rear facing away from the window. This will ensure that the polarity of each pocket is identical when attached to the cables. The polarity is clearly marked on the fixing posts. Damage to the light pocket will occur if the pockets are attached incorrectly.

Once you have determined where the light pocket is to be fitted, remove the allen screws from the posts on the rear of the pocket and attach the pocket to the cables. When level tighten allen screws.

Transformer should be fixed in a suitable position adjacent to your pocket kit. Mains wire should be connected to **plug socket or suitable fused spur**. Output leads from the transformer should be attached to cables using fittings provided as shown in diagram below. Please note that the **positive wire** has a **continuous black stripe**. This must be connected to the **positive** side of the panel or damage will occur.

Make all connections with power supply switched off

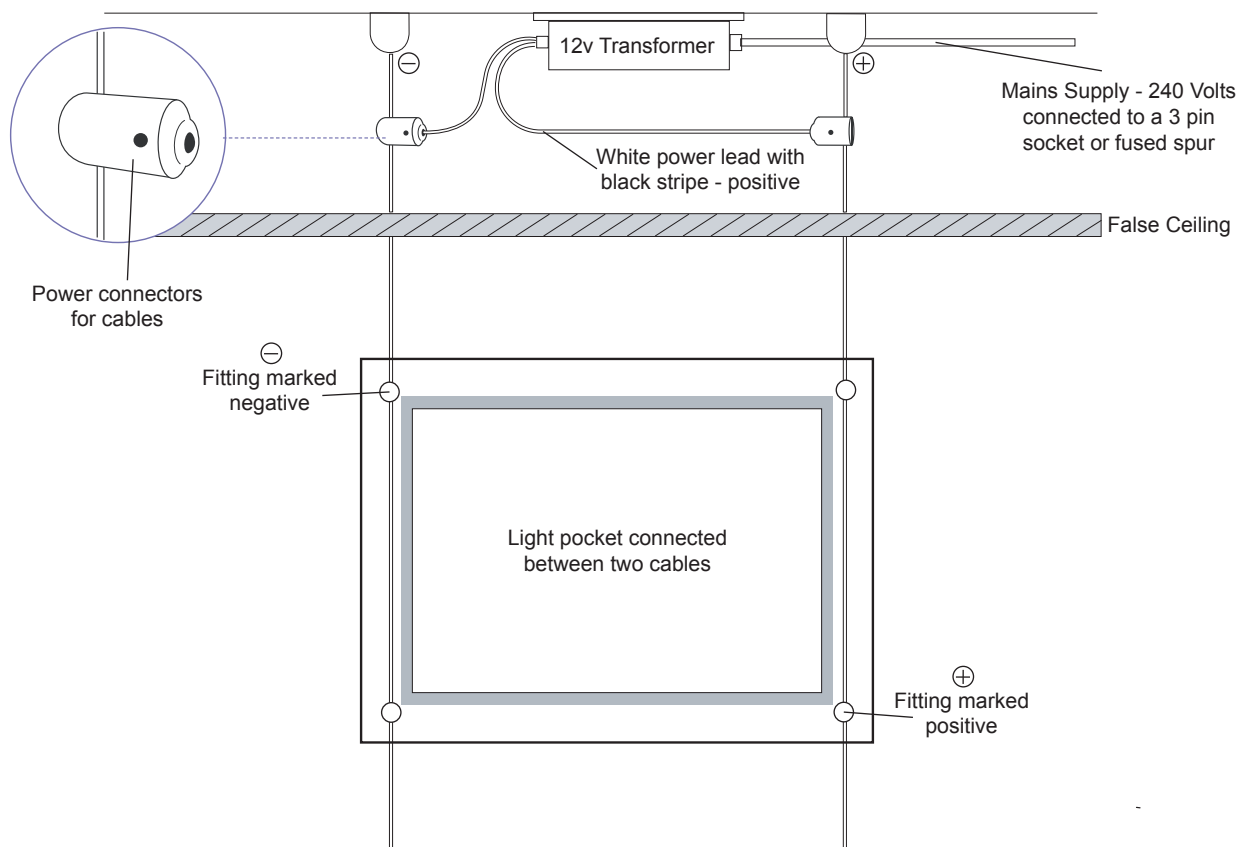

Tel: 0116 2554640 Fax: 0116 2550572

Illuminated LED Window Displays

Cable/Rod/Wall Support Centres :



7mm off each edge will be lost behind the frame. We advise to set margins of 15mm before any text or logos.

A2 = 594 x 420 mm
Visible = 580 x 406 mm
(15mm Silver Border)



Tel: 0116 2554640 Fax: 0116 2550572